

SF-120HLR

电脑切带机(冷、热红外)
Lable Cutter (cold & hot)



功能特性

高速：每分钟可切断 100 片左右。(以 50mm 长度为例)
高精度：光电感应器可准确的捕捉商标的切断线，从而精确的控制每次的有效切断长度。
切断面平整：热刀可对彩色丝带、轻薄编织带的切断面进行热封，且封口平整无毛边，但对厚料效果不佳。刀刃由进口优质钢材制成，使用寿命长。
自动操作：只需设定您所需的切断长度和数量，其余工作都自动完成。
自动暂停：一旦材料用完，将自动停止工作。
记忆功能：在开关关闭前，自动存储所设置的切断长度和切断数量以及切断速度。

可切材质


尼龙商标、织带、彩色缎带、背包带等尼龙材质。

Special features:

High speed: It can cut 100 cut per minute. (50mm long)
Accuracy: Cut-length is accurate owing to a stepping motor
Cutting type: Melting & cutting by hot knife. Label is cut neatly without fraying but not for heavy materials and installed with anti-static electricity device.
Automatic operation: It works automatically only by setting length and quantity
Automatic stopper: It stops automatically if materials run out during operation.
Memory: Set-length, set-q'ty & set-speed are not erased even if power off & on.

Aplication

Woven label, printed label, ribbon tape, bag band, etc.

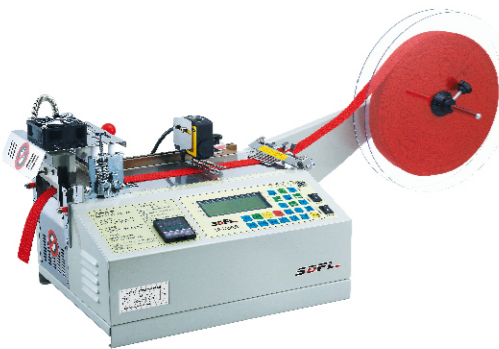

型号 Model	切断长度(mm) Cutting Length	最大切断宽度(mm) Max. Cutting Width	切断速度(p/min) Cutting Speed	刀片最高温度(℃) Max. Blade Temp	电压(v) Voltage	频率(Hz) Frequency	额定功率(kw) Power	包装尺寸L.W.H(mm) Package Size	重量(kg) Weight	装箱率(台) Loading Rate Pic
SF-120HLR	1-99999	95	90	250	110/220	50/60	0.66	410x525x430	24/29	1

SF-120H/300M

电脑切带机(热刀)配送带装置
Hot Knife Cutter With Auto-feeder

功能特性

高速：每分钟可切断 100-120 片。(以 50mm 长度为例)
高精度：每一次切断都由步进电机监控，以保证每次操作的高精确性。
切断面平整：热刀可对彩色丝带、轻薄编织带的切断面进行高温热封，且封口平整无毛边，刀刃由进口优质钢材制成，使用寿命长。
自动操作：只需设定您所需的切断长度和数量，其余工作都自动完成。
自动暂停：一旦材料用完，将自动停止工作。
记忆功能：在开关关闭前，自动存储所设置的切断长度和切断数量以及切断速度。
送带装置：采用红外传感控制，根据主机的工作速度自动调节送带速度。预放转送橡胶，使其保持统一的张力，可确保切断长度的准确性。

可切材质

松紧带、编织带、尼龙织带、彩色缎带、背包带等尼龙材质。

Special features:

High speed: It can cut 100-120 cut per minute. (50mm long)
Accuracy: Cut-length is accurate owing to a stepping motor.
Cutting type: Melting & cutting by hot knife, tapes are cut neatly without fraying and installed with anti-static electricity device.
Automatic operation: It works automatically only by setting length and quantity.
Automatic stopper: It stops automatically if materials run out during operation.
Memory: Set-length, set-q'ty & set-speed are not erased even if power off & on.
Auto-feeding machine: for multi-purpose pre-feeding, especially for heavier and elastic material, it is applicable for 120series auto-cutting machine. Pre-feeding device to keep a constant tension of elastic band for correct length.

Aplication


Woven tapes/strip tapes, ribbon tape, bag band, webbing, etc.



型号 Model	送带速度(mm) Feeding Speed	最大切断宽度(mm) Feeding Width	电机转速(r/min) Motor Speed	电压(v) Voltage	频率(Hz) Frequency	额定功率(kw) Power	包装尺寸L.W.H(mm) Package Size	装箱率(台) Loading Rate Pic
SF-120H/300M	自动	140	1500	110/220	50/60	0.06	410x525x430	1

SF-110LR

电脑切带机(冷、热)
Economic belt loop cutter



功能特性

高速：每分钟可切断 70 片。(以 50mm 长度为例)
高精度：每一次切断都由步进电机监控，以保证每次操作的高精确性。
切断面平整：热刀可对彩色丝带、轻薄编织带的切断面进行热封，且封口平整无毛边，但对厚料效果不佳。刀刃由优质进口钢材制成，使用寿命长。
自动操作：只需设定您所需的切断长度和数量，其余工作都自动完成。

可切材质

尼龙编织带、彩色缎带、背包带等尼龙材质。

Special features:

High speed: It can cut 70 pcs per minute. (50mm long)
Accuracy: Cut-length is accurate owing to a stepping motor.
Cutting type: Melting & cutting by hot knife, woven label is cut neatly without fraying but not for heavy materials and installed with anti-static electricity device.
Automatic operation: It works automatically only by setting length and quantity.

Aplication


Woven Tapes, Strip Tapes, Bag Band, etc. But no pure cotton materials.



型号 Model	切断长度(mm) Cutting Length	最大切断宽度(mm) Max. Cutting Width	切断速度(p/min) Cutting Speed	刀片最高温度(℃) Max. Blade Temp	电压(v) Voltage	频率(Hz) Frequency	额定功率(kw) Power	包装尺寸L.W.H(mm) Package Size	重量(kg) Weight	装箱率(台) Loading Rate Pic
SF-110LR	1-9999	65	70	250	110/220	50/60	0.57	410x525x430	24/29	1

SF-110H

电脑切带机(热刀)
Economic Hot Knife Cutter

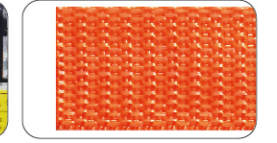

功能特性

高速：每分钟可切断 70 片。(以 50mm 长度为例)
高精度：每一次切断都由步进电机监控，以保证每次操作的高精确性。
切断面平整：热刀可对丝带、轻薄编织带的切断面进行热封，且封口平整无毛边，但对厚料效果不佳。刀刃由优质进口钢材制成，使用寿命长。
自动操作：只需设定您所需的切断长度和数量，其余工作都自动完成。

可切材质

尼龙编织带、彩色缎带、背包带等尼龙材质。

Special features:

High speed: It can cut 70 pcs per minute. (50mm long)
Accuracy: Cut-length is accurate owing to a stepping motor.
Cutting type: Melting & cutting by hot knife, woven label is cut neatly without fraying but not for heavy materials and installed with anti-static electricity device.
Automatic operation: It works automatically only by setting length and quantity.

Aplication



Woven Tapes, Strip Tapes, Bag Band, etc. But no pure cotton materials.



型号 Model	切断长度(mm) Cutting Length	最大切断宽度(mm) Max. Cutting Width	切断速度(p/min) Cutting Speed	刀片最高温度(℃) Max. Blade Temp	电压(v) Voltage	频率(Hz) Frequency	额定功率(kw) Power	包装尺寸L.W.H(mm) Package Size	重量(kg) Weight	装箱率(台) Loading Rate Pic
SF-110H	20-9999	68	70	320	110/220	50/60	0.57	410x525x430	24/29	1

SF-110L

电脑切带机(冷刀)
Economic Cold Knife Cutter



功能特性

高速：每分钟可切断 70 片。(以 50mm 长度为例)
高精度：每一次切断都由步进电机监控，以保证每次操作的高精确性。
切断面平整：刀刃由优质进口钢材制成，保证了切断面的平整性，使用寿命长。
自动操作：只需设定您所需的切断长度和数量，其余工作都自动完成。

可切材质

编织带、魔术贴、塑料软管、鞋带、塑料拉链、电脑排线等。

Special features:

High speed: It can cut 70 pcs per minute. (50mm long)
Accuracy: Cut-length is accurate owing to a stepping motor.
Cutting type: Cutting is neatly due to a using a High-Speed Steel knife which is durable.
Automatic operation: It works automatically only by setting length and quantity.

Aplication


Woven Tapes, Strip Tapes, Velcro tapes, Soft Plastic Tubes, Plastic Zipper, Small Webbing, etc.



型号 Model	切断长度(mm) Cutting Length	最大切断宽度(mm) Max. Cutting Width	切断速度(p/min) Cutting Speed	电压(v) Voltage	频率(Hz) Frequency	额定功率(kw) Power	包装尺寸L.W.H(mm) Package Size	重量(kg) Weight	装箱率(台) Loading Rate Pic
SF-110L	1-9999	70	70	110/220	50/60	0.32	410x525x430	24/29	1

SF-110R

电脑切带机(圆角)
Economic Velcro Tape Round Cutter



功能特性

高速：每分钟可切断 70 片。(以 50mm 长度为例)
高精度：每一次切断都由步进电机监控，以保证每次操作的高精确性。
切断面平整：刀模由优质进口钢材制成，保证了切断面的平整性，使用寿命长。
自动操作：只需设定您所需的切断长度和数量，其余工作都自动完成。

可切材质

魔术贴。

Special features:

High speed: It can cut 70 pcs per minute. (50mm long)
High-accuracy: Stepping motor ensures every cutting to be precisely.
Cutting type: Cut-length is accurate owing to a stepping motor.
Automatic operation: It works automatically only by setting length and quantity.

Aplication

Velcro Tape Only.



型号 Model	切断长度(mm) Cutting Length	最大切断宽度(mm) Max. Cutting Width	切断速度(p/min) Cutting Speed	电压(v) Voltage	频率(Hz) Frequency	额定功率(kw) Power	包装尺寸L.W.H(mm) Package Size	重量(kg) Weight	装箱率(台) Loading Rate Pic
SF-110R	1-9999	10-25	70	110/220	50/60	0.32	410x525x430	24/29	1