

直驅式電子平車拖輪

PULLER WITH DIRECT-DRIVING COMPUTERIZED




HCP-520 直驅式電子平車拖輪
PULLER WITH DIRECT-DRIVING COMPUTERIZED



LxWxH: 365x365x300 mm N.W./G.W.:9/10 kgs



HCP-530 直驅式電子平車拖輪
PULLER WITH DIRECT-DRIVING COMPUTERIZED

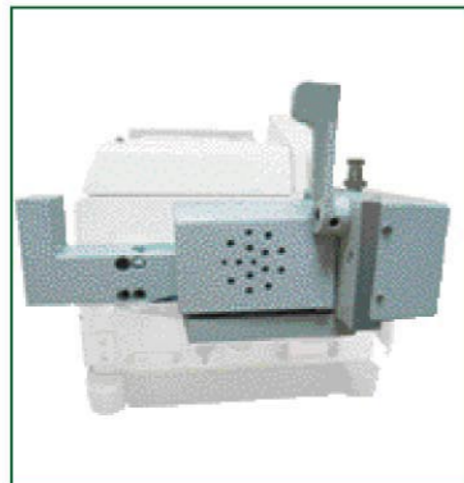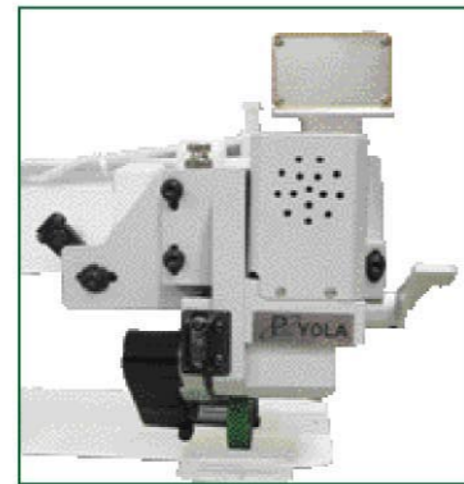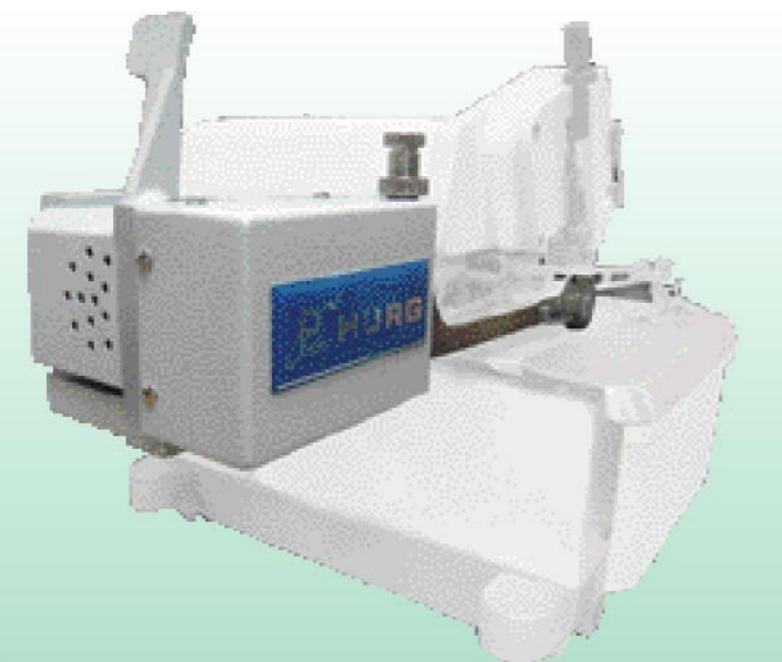

- 可與車針同步，縫針不易斷裂。
Simultaneous speed, the needle is unbreakable.
- 智慧型拖輪，可調針目大小。
Smart puller, adjusted distance.
- 倒針時，拖輪同時反方向轉動，免提起拖輪，減低噪音。
Puller can be pull back when reverse sewing.
- 多機種皆適用，如：平車、三本車、人字車、埋夾車、包縫車。
Many models are applicable.



● Power: 110V~240V, 50/60Hz

拖輪系列產品

PULLER ATTACHMENT

HPL 單針、雙針車用(一般布料型)
FOR SINGLE OR TWIN NEEDLE (General material)




LxWxH: 615x374x238 mm N.W./G.W.: 11 / 13 kgs

HPS 小輪、單針、雙針車用(薄物短距型)
FOR SMALL ROLLER, SINGLE OR TWIN NEEDLE (Short thin material)



LxWxH: 615x374x238 mm N.W./G.W.: 11 / 13 kgs

HPL-S1 飾縫車用(一般布料型)
FOR FLAT BED COVERSTITCH
(General material)

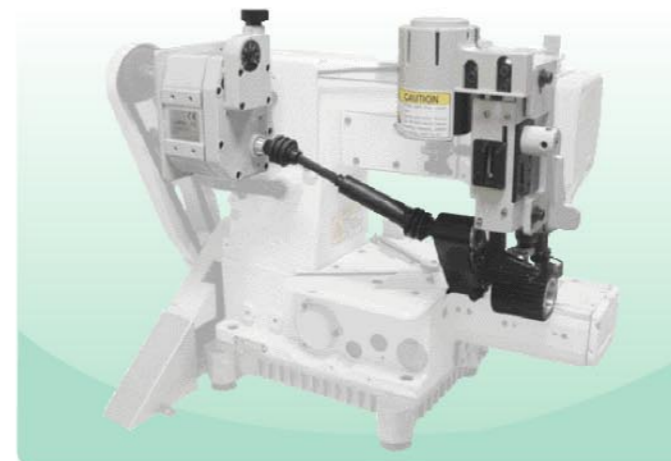

LxWxH: 615x374x238 mm N.W./G.W.: 8 / 10.5 kgs

- 滾輪尺寸：直徑 55 mm，寬度 15 / 35 / 50 mm
Roller : Diameter 55 mm, Width 15 / 35 / 50 mm

HPL-S2 筒型飾縫車用(一般布料型)
FOR CYLINDER BED COVERSTITCH
(General material)



LxWxH: 615x374x238 mm N.W./G.W.: 8.5 / 11 kgs

- 附專用基座及下輪
Special bracket and lower roller
- 上輪：直徑 55 mm，寬度 15 / 35 / 50 mm
下輪：直徑 27 mm，寬度 60 mm
Upper roller : Diameter 55 mm, Width 15 / 35 / 50 mm
Lower roller : Diameter 27 mm, Width 60 mm

- 具有多種選擇性拖輪，能適應不同質料之車縫。
With various optional rollers for different kinds of sewn materials.
- 下有滾軸底盤與拖輪上下滾動，使布料移動更加順暢。
The roller could roll with the rolling-plate, cloth can be moved more smooth.
- 滾輪尺寸：直徑 55 mm，寬度 15 / 35 / 55 mm
Roller : Diameter 55 mm, Width 15 / 35 / 55 mm

